


Raynor Sentinel™ 360

DC LED BATTERY BACKUP BELT DRIVE WIFI WITH INTEGRATED CAMERA

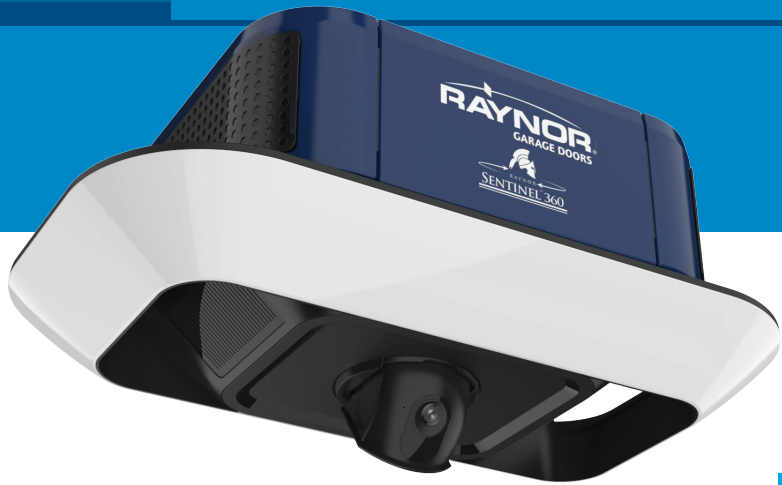

87504RGD-267
SMART GARAGE OPENER

POPULAR FEATURES

QUIET & SMOOTH OPERATIONS best-in-class belt drive system and DC motor provides reliable operation and lasting service

CAMERA WITH 2-WAY COMMUNICATION from a built-in 140° wide angle camera that lets you see and hear what is happening in your garage through the myQ app

LED CORNER TO CORNER LIGHTING increases the functionality of the garage with 2,000 lumens of LED light provided on a 360° built in ring

MYQ® CONNECTED control, secure and monitor the garage from the myQ app anytime, from anywhere

SECURE IN-GARAGE DELIVERY enables Amazon Key In-Garage Delivery - free for Amazon Prime members

SECURITY+ 2.0® sends a new code with every remote click

THE PROTECTOR SYSTEM® invisible light beam auto-reverses the door if there is an obstruction

POSILOCK® PROTECTION electronically protects against forced openings

DIAGNOSTICS myQ Diagnostics in the myQ app provides real-time insights for your garage door via the Health Report. You will be sent alerts if an issue arises and connected to professional services if needed

IN THE BOX



SMART CONTROL PANEL®

Intuitive menu-driven panel lets you easily program remote controls, adjust settings, and even get system diagnostics.

880RGDW • 6081093



3-BUTTON REMOTE CONTROL

Operate up to 3 openers or myQ light accessories from one remote

893RGX • 2220188



INTEGRATED BATTERY BACKUP

Powers up the opener when the power is out

485LM • 6080759



WIRELESS KEYLESS ENTRY

Provides convenient, secure access from outside the garage with a 4-digit PIN

877MGX • 2220189

POWERFUL ADD-ONS



MYQ SMART CAMERA

Enable secure video capabilities in your garage

SGC1WLM • 6081054



MINI UNIVERSAL REMOTE CONTROL

Compact and portable to provide quick, easy garage access

374UT • 2220193



MOTOR

12V DC, 53 RPM, automatic thermal protection, permanent lubrication

MECHANICS

- Steel chassis, T-rail and Trolley, full reinforced belt drive mechanism (63:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- DC WiFi logic board with built-in surge suppressor

POWER

120V AC, 60 Hz voltage, 2.7 current rating, UL listed, 6' power cord (3-prong)

SPEED

9" per second upward, 6.5" per second downward

LIGHTING

2,000 lumens integrated LED (360°)

DIMENSIONS

Opener Head: 10.5" L x 18.7" W x 8.185" H

Note: when both decorative doors are open, the width of the opener is 30".

Rail Options:	7'	8'	10'
Installed Length	124"	139"	163"
Max Opening	7'6"	8'6"	10'6"

Headroom Clearance Required: 2"



SECURITY+ 2.0®

Radio Controls:

- Operating range ~200': Operating temperature: -40°F to 150°F
- (2) 3-Button Remote Controls
- Remote Control Code Format: Security+ 2.0, premium remote control is backwards compatible to all Raynor openers manufactured since 1993
- Garage Door Opener Code Format: Security+ 2.0
- Anti-burglary Coding

Encrypted Controls:

- Smart Control Panel®
- Timer-to-Close
- Program Remote Controls
- Keypads and myQ accessories
- Maintenance Alert System
- Easy WiFi Setup

MYQ RADIO

- 902-928 MHz 50-channel FHSS (frequently hopping spread spectrum)
- Provides 2-way communication from garage door opener and myQ accessories
- Enables monitoring and control of garage door openers via smartphone or tablet.

HOMELINK® COMPATIBLE (VERSION 4.0 OR HIGHER)

May require an external adapter depending on the model and year of vehicle. Visit HomeLink.com for additional information



SHIPPING

Carton 1 Shipping Details

Dimensions: 20.1" x 12.1" x 9.7"

Weight: 25 lbs

Contents:

- Garage Door Opener Head
- Battery
- Smart Control Panel
- (2) 3-Button Remote Controls
- Wireless Keyless Entry System
- The Protector System® Safety Reversing Sensors

Carton 2 Shipping Details

Dimensions: 10'4" x 5" x 5" (for 7' Rail)

Weight: 17 lbs

Contents:

- Assembled Solid-Steel Belt T-Rail



WARRANTIES

Lifetime: Belt and Motor

5 Years: LED and Parts

1 Year: Battery, Camera and Accessories

*: To reduce the risk of injury to persons, only enable Timer-to-Close and myQ remote operation features when opener is installed on a sectional door.