


# Sergeant™ II with WiFi®

## DC BATTERY BACKUP CHAIN DRIVE

**8160WBRGD**  
**TRUSTED RELIABILITY**  
**WITH BATTERY BACKUP**

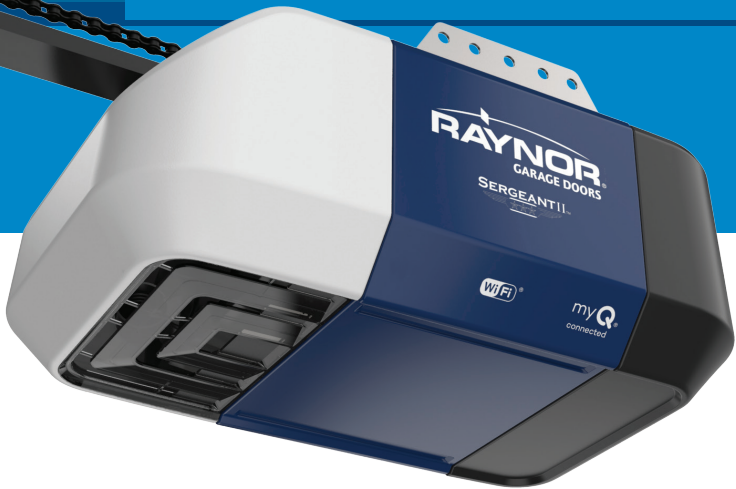

### POPULAR FEATURES

**DC MOTOR** is purposefully designed for quiet performance

**CHAIN DRIVE SYSTEM** for steady performance and industrial strength

**SOFT START/STOP** for smooth operation

**BUILT-IN WIFI** for the easiest way to connect the garage

**MYQ MOBILE APP** lets users receive alerts and control the opener from anywhere

**SECURITY+ 2.0®** safeguards garage access by sending a new code with every click

**POSILOCK®** electronically protects against forced openings

**ALERT-2-CLOSE** signals when a door is being closed by myQ

**THE PROTECTOR SYSTEM®** invisible light beam auto-reverses the door if there is an obstruction

**DIAGNOSTICS** myQ diagnostics in the myQ app provides real-time insights for your garage door via the Health Report. You will be sent alerts if an issue arises and connected to professional services if needed.

### IN THE BOX



#### MULTI-FUNCTION CONTROL PANEL

Operates the garage door opener and lights from inside the garage.

882RGDW • 6081094



#### 3-BUTTON REMOTE CONTROL

Operate up to 3 openers or MyQ light accessories from one remote

893RGX • 2220188



#### INTEGRATED BATTERY BACKUP

Powers up the opener when the power is out

485LM • 6080759

### POWERFUL ADD-ONS



#### MYQ SMART CAMERA

Enable secure video capabilities in your garage

SGC1WLM • 6081054



#### MINI UNIVERSAL REMOTE CONTROL

Compact and portable to provide quick, easy garage access

374UT • 2220193



**MOTOR**

12V DC, 53 RPM, automatic thermal protection, permanent lubrication

**MECHANICS**

- Steel chassis, T-rail and Trolley, full chain drive mechanism (63:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- DC WiFi logic board with built-in surge suppressor

**POWER**

120V AC, 60 Hz voltage, 2.7A current rating, UL listed, 4' power cord (3-prong)

**SPEED**

8.5" per second upward, 6.5" per second downward

**LIGHTING**

100 watt light bulb, enhanced CFL (Compact Florescent) compatible, max. 26 watts, solid-state light delay, adjustable time, disabled in battery backup mode

**DIMENSIONS**

Opener Head: 15.2" L x 10.5" W x 7.67" H

Rail Options:	7'	8'	10'
Installed Length	128"	140"	164"
Max Opening	7'6"	8'6"	10'6"

Headroom Clearance Required: 2"



**SECURITY+ 2.0®**

Radio Controls:

- Operating range ~200': operating temperature: -30°F to 150°F
- 3-button remote controls
- Remote control code format: Security+ 2.0
- Keyless entry: Security+ 2.0
- Anti-burglary coding: Security+ 2.0

Encrypted Controls:

- Multi-Function Control Panel®
- Program Remote Controls
- Maintenance Alert System
- Easy WiFi Setup

**MYQ RADIO**

- 902-928 MHz 50-channel FHSS (frequently hopping spread spectrum)
- Provides 2-way communication from garage door opener and myQ accessories
- Enables monitoring and control of garage door openers via smartphone or tablet.

**HOMELINK® COMPATIBLE (VERSION 4.0 OR HIGHER)**

May require an external adapter depending on the model and year of vehicle. Visit HomeLink.com for additional information



**SHIPPING**

Carton 1 Shipping Details

Dimensions: 19.81" x 11.94" x 11.19"

Weight: 22 lbs

Contents:

- Garage Door Opener Head
- Battery
- Multi-Function Control Panel
- 3-Button Remote Control

Carton 2 Shipping Details

Dimensions: 10'4" x 5" x 5" (for 7' Rail)

Weight: 20 lbs

Contents:

- Assembled Solid-Steel Chain T-Rail



**WARRANTIES**

4 Years: Motor

1 Year: Battery and Accessories

\*: To reduce the risk of injury to persons, only enable Timer-to-Close and myQ remote operation features when opener is installed on a sectional door.