RAYNOR GARAGE DOORS

TM200C

Sectional Insulated Steel Door - 26 Gauge Exterior Skin

10 yr LIMITED WARRANTY

The same great quality and durability you get from all ThermaSeal models, with the added benefit of 14 timeless colors to choose from.

- Sections are evenly filled using a computer-controlled continuous process with a CFC free NeuFoam™ polyurethane insulation
- NeuFoam™ insulation is zero-ozone depleting and provides higher thermal properties which result in significant energy savings
- Cavity-free, uniform insulation ensures excellent adhesion to the sheet metal, resulting in an exceptional strength to weight ratio that qualifies for a wide range of applications
- Raynor's trademark full perimeter weather sealing system
- Sections fabricated from pre-painted, hot dipped galvanized steel sheets with rigid polyurethane insulation core, face sheet stucco embossed and pencil groove
- Sections feature a thermal break between the interior and exterior steel skin
- Retrofit and individual door section replacements available up to 20'2"

The swatches shown on monitors and printed materials may vary from the actual color. For a true representation of the color, visit your local Raynor Dealer.

Product Specifications

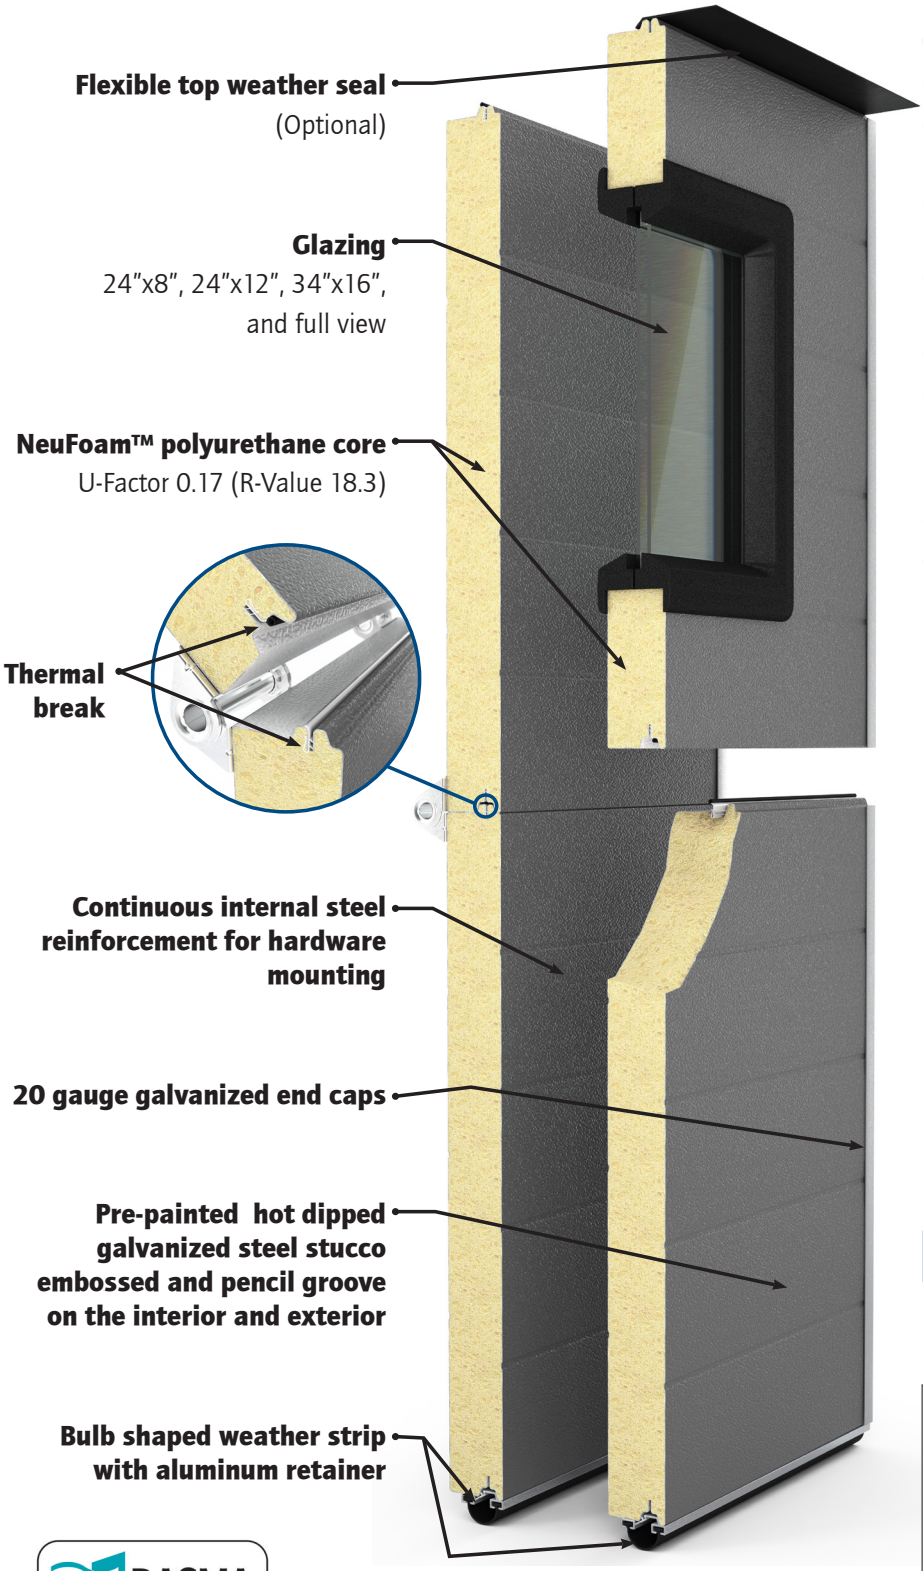

Section Details

3/8" tongue and groove, foamed-in-place polyurethane insulation, thermal break. 20 gauge continuous reinforcing strip at top and bottom edge for hardware attachment.

Total Door Thickness:	2"
Thermal Value of Sections:	Tested U-Factor 0.17 (Calculate R-Value 18.3)
Face Sheet Pattern:	**Exterior:** Pencil groove **Interior:** Pencil groove
Face Sheet Texture:	**Exterior:** Stucco **Interior:** Stucco
Face Sheet Thickness:	**Exterior:** 26 gauge **Interior:** 27 gauge
Section Heights:	21", 24"
Maximum Opening Width*:	20' (Black & Charcoal) 36' (Almond, Frost White, Desert Tan, Sandstone, Beige, Bronze, Brown, Sepia, Slate, Battleship Gray, Iron Ore)
Maximum Opening Height*:	24'-0"
Finish:	Two coat, baked-on paint system on exterior side, primer and polyester finish coat.

Colors:

*Maximum door width and height may have limitations based on door weight, track configuration and springing. Not all sizes of door are available with all options.

Glazing Options

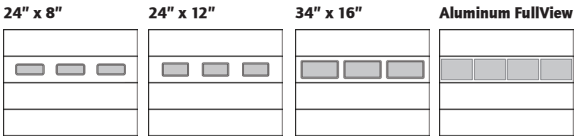

24" x 8" sealed glass unit set in molded frame

24" x 12" sealed glass unit set in molded frame

34" x 16" sealed glass unit set in molded frame

1/8", 3/16", 1/4", 1/2" glass options

Warranty

10 year limited warranty

Professionally installed and serviced by:

DASMA Door & Access Systems Manufacturers Association International
THERMAL PERFORMANCE VERIFICATION PROGRAM
www.dasma.com/thermal

DASMA TPV Program

The DASMA Thermal Performance Verification (TPV) Program is a voluntary program to certify and verify the thermal performance ratings of sectional door products using third-party testing and inspection. The U-Factor on this model is verified through the DASMA TPV Program.

©2026 Raynor